

Antero's surfaces flow together in a stunning and sophisticated look that anyone would be proud to have in their kitchen. This new design has features like the quiet Captur™ system and brilliant halogen lighting.

SIZE	WHITE	BLACK	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	CLSC130WW	CLSC130BL	CLSC130SS	HPFA130 (Type C1)	HPF30 (Type Xc)

HVI PERFORMANCE							
Duct Orientation	Size	Damper	Sones		CFM		
			Normal	High	Normal	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	1.5	5.0	140	130	220
Horizontal - Rectangular	3¼ in. x 10 in.	Included	1.5	5.0	110	128	210
Round - Vertical	7 in.	Sold Separately	1.5	5.0	150	110	240

FEATURES	
Max. Blower Airflow	300 CFM
Control type	2-speed Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level 50 W Halogen (bulbs included)
Grease Filters	Open Mesh (Qty. 2)
Installation Hardware	no
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately


AC INPUT	
120 V, 60 Hz - 1.4 AMPS	

OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
Make-up Air Dampers	MD6TU, MD8TU and MD10TU


MOUNTING HEIGHT	
18 in. to 24 in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year (See installation manual for full warranty text.)	

FOR INDOOR USE ONLY

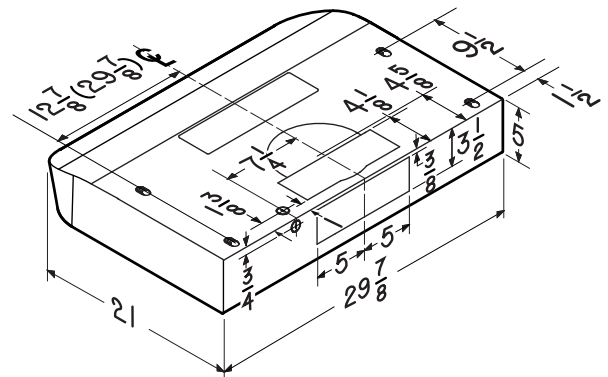

Dimensions shown in inches.

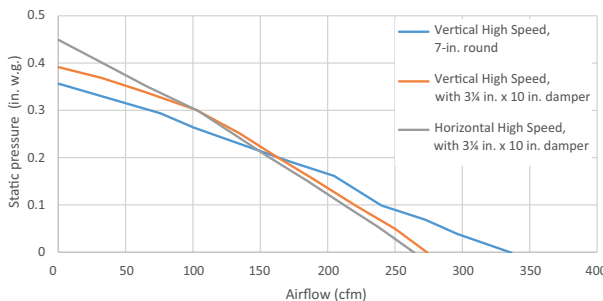

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99045766F